

DRIVELINE

HiTEC[®] 3435A CVT Fluid Additive Package



Multi-vehicle CVT Additive Package with Excellent
Anti-shudder Durability

HiTEC® 3435A CVT Fluid Additive Package

Multi-vehicle CVT Additive Package with Excellent Anti-shudder Durability

Application

HiTEC® 3435A is formulated using Afton's broad vehicle application knowledge and transmissions expertise to produce a transmission fluid meeting the performance requirements of a wide variety of vehicles equipped with push-belt and chain CVTs.

Key Performance Benefits

For the Oil Marketer:

- Multi vehicle suitability enabling optimized supply chain and reduced operational cost
- Assurance through excellent performance in both vehicle and Bosch Belt Box tests

For the Driver:

- Extended friction durability to provide superior anti-shudder performance and enhanced driving comfort
- A well-balanced, high level of both torque capacity and anti-shudder performance to provide:
 - Higher safety factor
 - Longer transmission life
 - Extended service interval
- Excellent extreme pressure and anti-wear performance for the better protection of transmission
- Enhanced oxidative stability for longer fluid life and extended service interval
- Seal compatibility for better leakage prevention

Recommended Dosage

HiTEC® 3435A additive package is recommended for use at 17.0% weight with suitable API Group III base oils. Please contact your Afton Chemical representative for formulation recommendation.

Typical Characteristics

Inspection

Appearance	Typical
Specific Gravity @ 15.6/15.6°C	Dark brown liquid
Kinematic Viscosity @ 100°C, cSt	0.913
Flash Point, (PMC), °C	108
	160

Handling Information

Maximum handling temperature: 70 °C


Shelf life @ ambient: 24 months

Assurance through Proven Vehicle Tests



Nissan Murano, Toyota Ractis and Subaru Forester cycling test all show Pulley, Belt and Chain are in excellent conditions

Superior Anti-shudder Durability

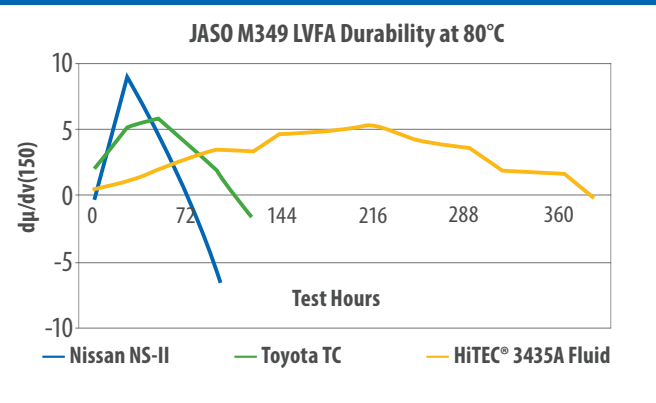

Excellent Torque Capacity

