# FUELS

# **HiTEC®** 4133**G**

## **Multifunctional Diesel Fuel Additive**



Specially Formulated for Today's Modern Diesel Fuels and Typical Biodiesel Blends





### **HITEC®** 4133G Multifunctional Diesel Fuel Additive

Specially Formulated for Today's Modern Diesel Fuels and Typical Biodiesel Blends



#### **Application**

HiTEC® 4133G is a multifunctional diesel fuel additive formulated to provide improved performance in today's modern diesel engines. It is safe for use in heavy-duty diesel powered equipment for on-road, off-road, and marine use. HiTEC® 4133G has been specially formulated with Afton's new Greenclean® Detergent Technology, providing complete injector cleanliness protection, including sticky internal injector deposits that can lead to poor engine performance and excessive downtime and maintenance costs. This product qualifies for the USA EPA CFR80.591A certification, meaning the product contains < 15 ppm (mg/L) sulfur.

#### **Key Performance Benefits**

- Cleans injector deposits, both traditional "coking" deposits, and sticky internal injector deposits
- Provides DW-10 detergency
- Helps reduce fuel system corrosion
- Helps improve fuel lubricity

#### **Recommended Dosage**

Performance	Treat Rate
Optimal "Keep Clean" (passing DW-10)	1:3750 gal (267 ppmv)
Economic Real World "Keep Clean / Clean Up"	1:2500 gal (400 ppmv)
Supreme Real World "Clean Up"	1:1250 gal (800 ppmv)


#### **Typical Characteristics**


Appearance	Dark amber liquid
Density @ 15°C, lbs/gal	7.48
Viscosity @ 40°C, mm2/s	4.0
Flash Point, °C (PMCC)	45 min.
Pour Point, °C	< -85


#### **Handling Information**

Max Handling Temp: 40°C

Shelf Life: 48 months @ ambient temperature

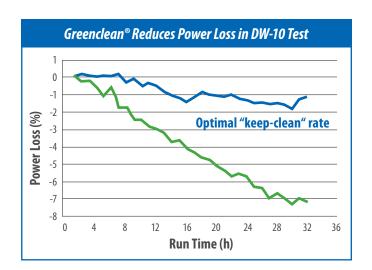





<sup>\*</sup>Actual results may vary.

This product is not intended for retail sale in Canada.

© 2015. Afton Chemical Corporation is a wholly-owned subsidiary of NewMarket Corporation (NYSE:NEU). HITEC® and Greenclean® are trademarks of Afton Chemical Corporation. 08/15...



