


DRIVELINE

HiTEC[®] 2417

Automatic Transmission Fluid Additive

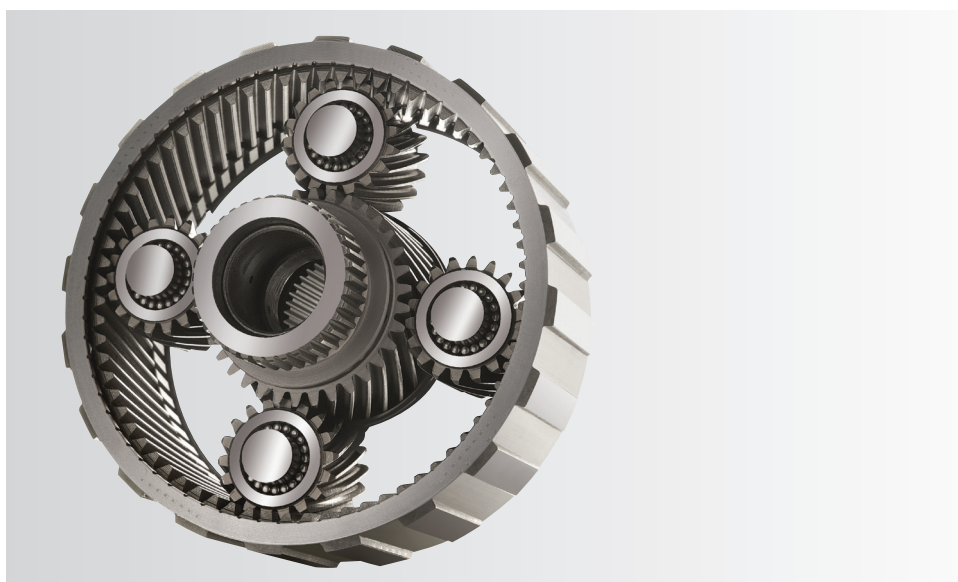

ATF Additive with GM and Ford Performance

HiTEC® 2417 Automatic Transmission Fluid Additive

ATF Additive with GM and Ford Performance

Application

HiTEC® 2417 is a complete additive package used for formulating premium quality automatic transmission fluids. This additive package has been specially designed to formulate oils that can be used for Ford and GM automatic transmissions that do not specify DEXRON®-VI, MERCON® V and Type F fluids. HiTEC® 2417 can also be used to formulate transmission fluids for some continuously variable transmissions.

Key Performance Benefits

Fluids formulated with HiTEC® 2417 additive can meet the following requirements:

- Allison C-4
- Caterpillar TO-2
- JASO M-315-95

Recommended Dosage

The recommended dosage for HiTEC® 2417 additive is 12.9% wt., with suitable low viscosity base stocks to provide lubricants satisfying the viscometric properties and overall performance requirements of all major ATF specifications. Please contact your Afton Chemical representative for specific recommendations.

Typical Characteristics

Appearance	Dark brown viscous liquid
Density, lbs/gal.	7.67
Viscosity at 100°C, cSt	240
Flash Point, °C (PMCC)	95 min.
Boron, % wt.	0.10
Sulfur, % wt.	0.22
Phosphorus, % wt.	0.60
Nitrogen, % wt.	0.83
Specific Gravity @ 15.6/15.6°C	0.922

Handling Information

Max Handling Temp: 60°C
Shelf Life: 24 months @ ambient

DEXRON® and MERCON® are registered trademarks for General Motors Corporation and Ford Motor Company, respectively.

© 2010. Afton Chemical Corporation is a wholly owned subsidiary of NewMarket Corporation (NYSE:NEU). HiTEC® is a trademark of Afton Chemical Corporation. 06/10.

The information in this bulletin is, to our best knowledge, sure and accurate, but all recommendations or suggestions are made without guarantee since the conditions of use are beyond our control. Afton Chemical Corporation and its affiliates disclaim any liability incurred in connection with the use of these data or suggestions. Furthermore, nothing contained herein shall be construed as a recommendation to use any product in conflict with existing patents covering any material or its use.