


DRIVELINE

HiTEC[®] 3421

Service Fill Automatic Transmission Fluid
Additive Package

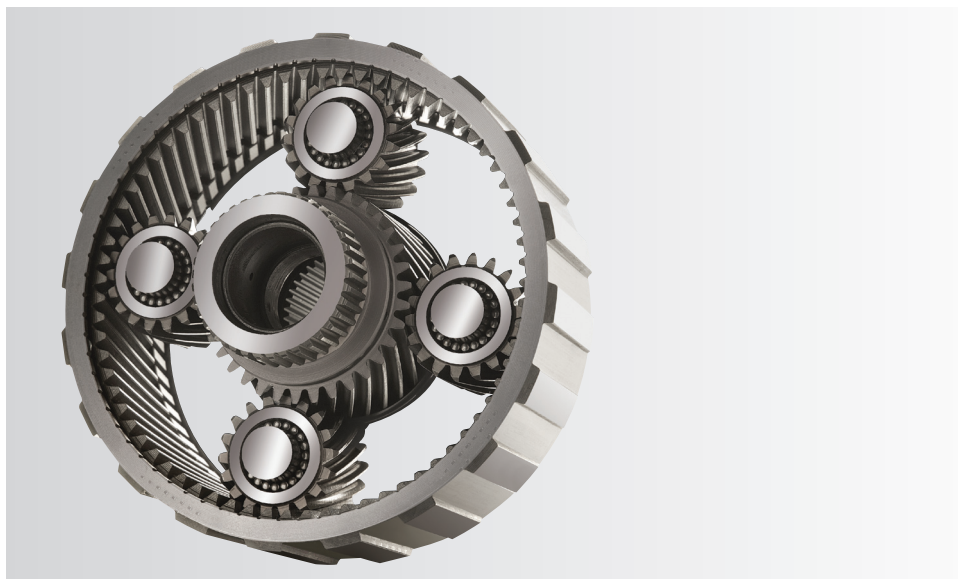

For Use in All Ford and GM Vehicles Prior of 2005 and Earlier

 **Afton**[®]
CHEMICAL
Passion for Solutions™

HiTEC® 3421 Service Fill Automatic Transmission Fluid Additive Package

For Use in All Ford and GM Vehicles of 2005 and Earlier

Application

HiTEC® 3421 automatic transmission fluid (ATF) additive has been formulated to meet the stringent transmission fluid requirements of Ford and General Motors, and it suitable for use in all Ford and GM vehicles of model years 2005 and earlier, excluding those vehicles specifying a Type F® fluid.

Key Performance Benefits

- Performance demonstrated in complete series of GM and Ford tests
- Suitable for use in applications calling for Allison TES 389 fluids
- Superior anti-wear protection
- Superior oxidation control
- Superior friction performance

Recommended Dosage

HiTEC® 3421 is used at 8.2% wt. (7.66% vol.) when combined with a suitable Group II base oil. Please contact your Afton Chemical representative for dosage limits specific to your formulation.

Typical Characteristics

Appearance	Hazy light amber liquid
Specific Gravity @ 15.6/15.6°C	0.913
Density, lbs/gal.	7.60
Viscosity @ 100°C, cSt	277
Viscosity @ 40°C, cSt	2543
Flash Point, °C (PMCC)	120 min.

Handling Information

Max Handling Temp: 70°C
Shelf Life: 18 months @ ambient temperature

HiTEC® 3421 ATF Additive is Suitable For Use in All Pre-2005 Ford and General Motors Vehicles

