


DRIVELINE

HiTEC[®] 4031

ATF Additive Package

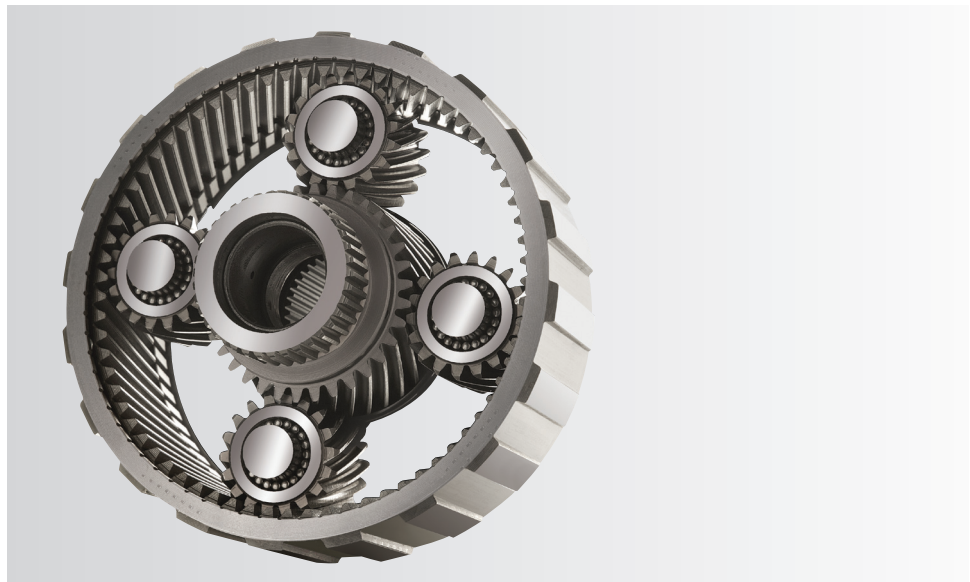

Approved Additive Technology for all Mercedes RWD
Passenger Car Automatic Transmissions

HiTEC® 4031 ATF Additive Package

Approved Additive Technology for all Mercedes RWD Passenger Car Automatic Transmissions

Automatically First™



Key Performance Benefits

- Industry leading friction durability for extended drain and smooth vibration free driving
- Mercedes recommended additive technology for 4 and 5 speed RWD ATs
- The only Mercedes approved and recommended additive technology for 7 speed (NAG2) RWD ATs and all AMG models
- Approved against MB 236.14
- Suitable for use against MB 236.1/6/7/9/10/12

Recommended Dosage

HiTEC® 4031 is recommended for use at a treat-rate of 6.85% wt. Please contact your Afton Chemical representative for specific recommendations.

Typical Characteristics


| | |
|--------------------------------------|-------------------------|
| Appearance: | Clear dark brown liquid |
| Density at 15°C, g/ml: | 0.928 |
| Kinematic Viscosity at 100°C, mm²/s: | 39 |
| Flash Point, °C (PMCC): | 130 min. |

Handling Information

Max Handling Temp: 60°C
Shelf Life: 18 months at ambient temperature

Approvals

Profile of finished fluid based on HiTEC® 4031

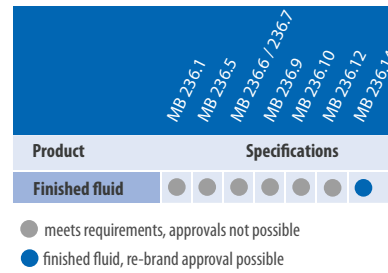

Please note this product is OEM and Oil company specific

