## FUELS

# HITEC® 46004 Diesel Performance Additive



Optimize Without Compromise - Multifunctional Additive Package for Diesel





### **HITEC®** 46004 Diesel Performance Additive

\*\*Green**clean**™3

Optimize Without Compromise - Multifunctional Additive Package for Diesel

#### **Application**

HiTEC® 46004 diesel performance additive is formulated with our latest Greenclean® detergent technology, designed for cost-effective injector control in both modern and older diesel vehicles.

HiTEC® 46004 provides optimal industry test performance (CEC XUD-9 and DW-10), ensuring injectors are kept clean and free from deposits.

#### **Key Performance Benefits**

- Keep clean and clean up performance in industry tests
- · Proven to rapidly restore engine cleanliness
- Formulated with antifoam to reduce tank filling time and minimize forecourt spillage
- Provides corrosion protection for tanks and engine components
- Effective in biodiesel fuel blends up to B10
- · Naphthalene depleted, not requiring R40 labelling

#### **Recommended Dosage**

Depending on your performance needs, the treat rate of HiTEC® 46004 can be modified to achieve a targeted level of performance. Dosage may vary depending on base fuels. Please consult your Afton contact for further information.

#### **Typical Characteristics**

Appearance:

Density at 15°C, g/ml:

Flash Point, °C (PMCC):

Pour point, °C:

Kinematic Viscosity @ 40°C, mm²/s:

Brown liquid

0.90

56 min.


<-50

Kinematic Viscosity @ 40°C, mm²/s:


8.3 cSt

#### **Handling Information**

Max Handling Temp: 45°C Shelf Life: 12 months

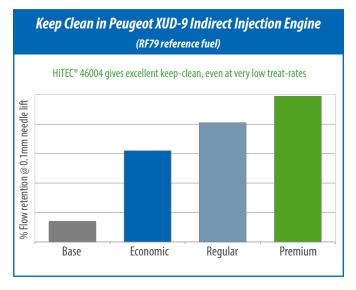

HiTEC® 46004 keeps deposits from forming that typically build up when using untreated base fuel.

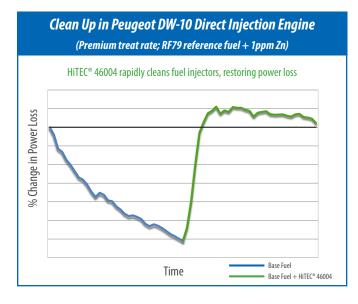

HiTEC® 46004 removes deposits that have built up on the diesel injectors.

