

FUELS

HiTEC[®] 6590

Fully Synthetic Gasoline Performance Additive



Formulated For All Gasoline Engine Platforms Including DIG
and Conventional PFI Intake Systems

 **Afton[®]**
CHEMICAL
Passion for Solutions[®]

HiTEC® 6590 Fully Synthetic Gasoline Performance Additive

Formulated For All Gasoline Engine Platforms Including DIG and Conventional PFI Intake Systems

Application

HiTEC® 6590's patented technology was designed to meet the challenges of direct injection engine technology, while continuing to deliver excellent performance in the traditional port fuel injection platform. A fully scalable additive with EPA and TOP TIER™ certification, HiTEC® 6590 delivers powerful keep-clean and clean-up performance at cost effective treat rates.

Key Performance Benefits

- Helps to keep clean and clean-up intake valves and injectors, which can result in:
 - Optimized fuel economy
 - Maximized power and acceleration
 - Reduced emissions
- Patented for use in DIG engines (U.S. Patent: 5,725,612; 7,422,161; 7,491,248; 7,766,982; 6,800,103; 7,112,230 and CA 2,231,965)
- Compatible in a wide range of ethanol blends
- Excellent combustion chamber deposit control
- Good demulsibility
- A-rating corrosion protection
- Low viscosity for easy handling

Recommended Dosage

HiTEC® 6590 is EPA, LAC Final Rule and TOP TIER™ certified. Please contact your Afton Chemical representative for specific recommendations.


Typical Characteristics

| | |
|--------------------------------|--------------|
| Appearance | Amber liquid |
| Density, lbs/gal. | 7.58 |
| Specific Gravity @ 15.6/15.6°C | 0.9099 |
| Flash Point, °C (PMCC) | 44 min. |
| Pour Point, °C | -50 max. |
| Viscosity @ 40°C, cSt | 12 |
| Viscosity @ -20°F, cSt | 400 max. |

Handling Information


Max Handling Temp: 35°C (up to 80°C under nitrogen)
Shelf Life: 24 months @ ambient temperature

Real World Intake Valve Deposit Clean-up Evaluation

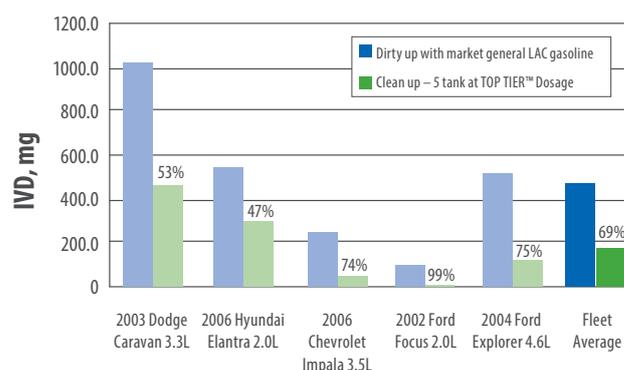

Excellent performance in PFI engines as shown by the 69% fleet average clean-up of intake valve deposits.

Clean Injectors = Better Engine Performance

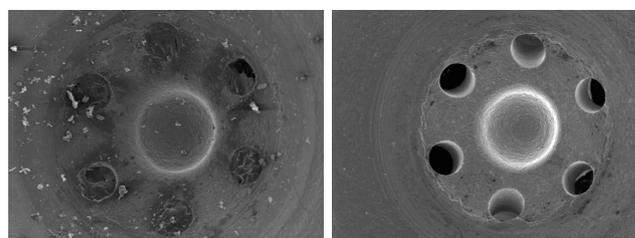

Base Fuel

HiTEC® 6590

Clean Valves = Better Engine Performance



Base Fuel

HiTEC® 6590