

FUELS

HiTEC[®] E85

Gasoline Performance Additive



Keeps Flexible Fuel Vehicles Running In Optimum Condition

HiTEC® E85 Gasoline Performance Additive

Keeps Flexible Fuel Vehicles Running In Optimum Condition

Application

HiTEC® E85 gasoline performance additive is designed to keep flexible fuel vehicles (FFV) running in optimum condition by controlling port fuel injector and intake valve deposits and protecting key fuel system components. A fully scalable additive, HiTEC® E85 provides a solution for both terminal and aftermarket treatment of E85 fuels.

Key Performance Benefits

- Designed for ethanol blended fuels up to E85
- Proven ability to:
 - Keep intake valves and fuel injectors clean
 - Clean-up intake valve deposits
 - Protect fuel system components
- Combustion chamber deposit control
- Corrosion protection
- Excellent low temperature properties
- Ethanol filterability and compatibility
- EPA certified

Recommended Dosage

Please contact your Afton Chemical representative for specific teat rate recommendations.

Typical Characteristics

Appearance	Colorless to light yellow liquid
Specific Gravity @ 15.6/15.6°C	0.934
Density, lbs/gal	7.79
Flash Point, °C (PMCC)	44 min.
Pour Point, °C	-60 max.
Viscosity @ -20F, cSt	300 max.
Viscosity @ 40C, cSt	10


Handling Information

Max Handling Temp: 43°C

Shelf Life: 42 months @ ambient temperature

HiTEC® E85 Flex Fuel Vehicle - IVD/CCD Keep Clean 2010 Chevy Impala

Fuel: 15% gasoline & 85% ethanol
Additive: 85 PTB dose of HiTEC® 6406

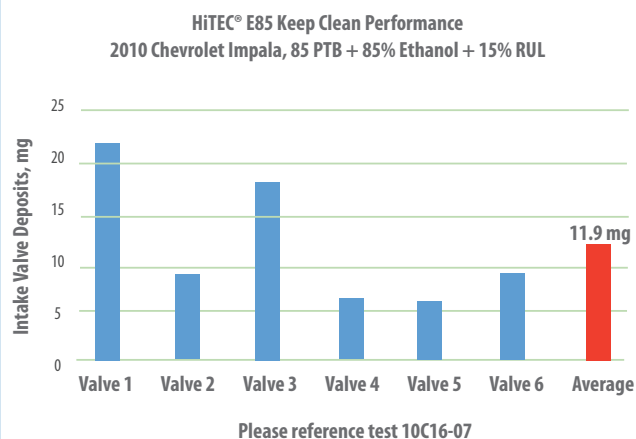

HiTEC® E85 Flex Fuel Vehicle - IVD/CCD Keep Clean 2010 Chevy Impala

Fuel: 15% gasoline & 85% ethanol
Additive: 85 PTB dose of HiTEC® 6406

