


DRIVELINE

HiTEC[®] 3411

Automatic Transmission Fluid Additive

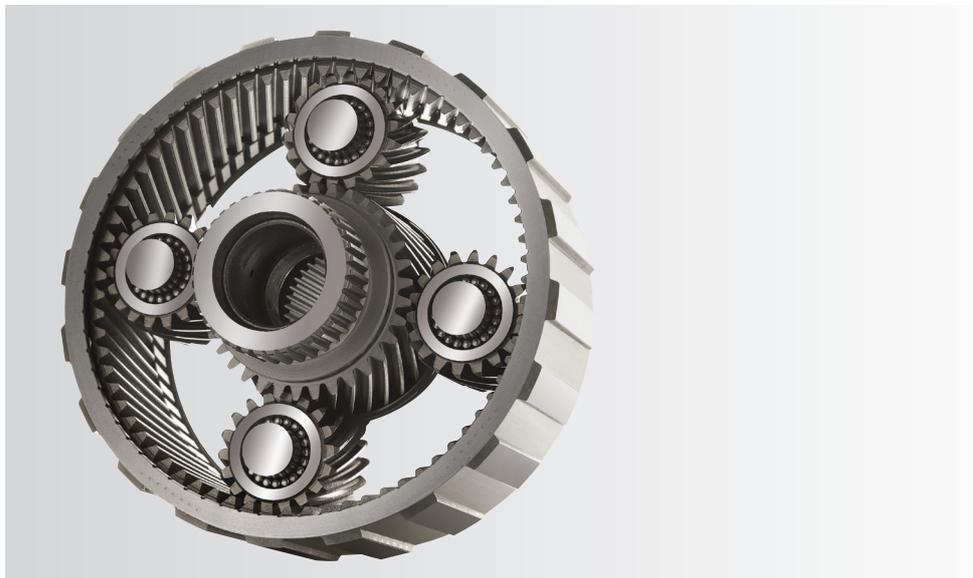

Service Fill Automatic Transmission Fluid

HiTEC® 3411 Automatic Transmission Fluid Additive

Service Fill Automatic Transmission Fluid

Application

HiTEC® 3411 automatic transmission fluid (ATF) additive has been formulated to meet all Ford & GM automatic transmissions that do not specify DEXRON®-VI, MERCON® V and Type F fluids.

Key Performance Benefits

- Performance demonstrated in complete battery of GM and Ford tests
 - Data set available upon request
- Superior anti-wear protection
- Superior oxidation control
- Superior friction performance

Recommended Dosage

HiTEC 3411® is used at 9.5% wt. (8.9% vol.) when combined with a suitable Group II base oil. Please contact your Afton Chemical representative for dosage limits to your formulation.

Typical Characteristics

Appearance	Dark amber hazy viscous liquid with or without fish eyes
Specific Gravity @ 15.6/15.6°C	0.918
Density, lbs/gal.	7.65
Viscosity @ 100°C, cSt	237
Viscosity @ 40°C	2290
Flash Point, °C (PMCC)	120 min.

Handling Information

Max Handling Temp: 70°C
Shelf Life: 24 months @ ambient temperature

* DEXRON® and MERCON® are registered trademarks for General Motors Corporation and Ford Motor Company, respectively.

© 2010. Afton Chemical Corporation is a wholly owned subsidiary of NewMarket Corporation (NYSE:NEU). HiTEC® is a trademark of Afton Chemical Corporation. 06/10.

The information in this bulletin is, to our best knowledge, sure and accurate, but all recommendations or suggestions are made without guarantee since the conditions of use are beyond our control. Afton Chemical Corporation and its affiliates disclaim any liability incurred in connection with the use of these data or suggestions. Furthermore, nothing contained herein shall be construed as a recommendation to use any product in conflict with existing patents covering any material or its use.