

DRIVELINE

## HiTEC<sup>®</sup> 369

Automotive Gear Oil Additive



For Use in Light-duty and Heavy-duty Axles

# HiTEC® 369 Automotive Gear Oil Additive

For Use in Light-duty and Heavy-duty Axles

## Application

HiTEC® 369 automotive gear oil additive is a premium automotive gear oil additive designed to produce lubricants for use in automotive light-duty and heavy-duty axles, and heavy-duty non-synchronized manual transmissions. Lubricants formulated with HiTEC® 369 additive can also be used for top-off service fill in non-limited slip differential axles. HiTEC® 369 can also be used in conjunction with HiTEC® 397 limited slip additive to produce an automotive gear oil with excellent limited slip capability.

HiTEC® 369 gear oil additive with HiTEC® 397 limited slip additive provides:

- Unsurpassed frictional durability
  - Reduces potential for vibration
- Limited Slip necessary for high horsepower, high torque vehicles
  - SUV's, light duty trucks

## Key Performance Benefits

- Excellent thermal and oxidation stability
- Exceptional compatibility with commonly used seal materials
- Good EP protection
- Superior copper corrosion protection
- Strong foam suppression
- Superior storage stability
- Soluble in Group I and Group II base stocks
- Excellent handling and pump-ability

## Typical Characteristics

Appearance	Clear light amber liquid
Specific Gravity @ 15.6/15.6°C	1.022
Density, lbs/gal.	8.51
Viscosity @ 100°C, cSt	13
Flash Point, °C (PMCC)	85 min.


## Handling Information

Max Handling Temp: 65°C  
Shelf Life: 24 months @ ambient temperature

## Recommended Dosage

Automotive:	
6.0% wt. (5.4% vol.)	API MT-1, API GL-5, SAE J-2360, ArvinMeritor O76-D (SAE 80W-90), O76-A (SAE 85W-140), Ford WSP-M2C197-A (SAE 80W-90), Scania STO 1:0, MAN 342 M2
3.0% wt. (2.7% vol.)	API GL-4

Please contact your Afton Chemical representative for specific recommendations.

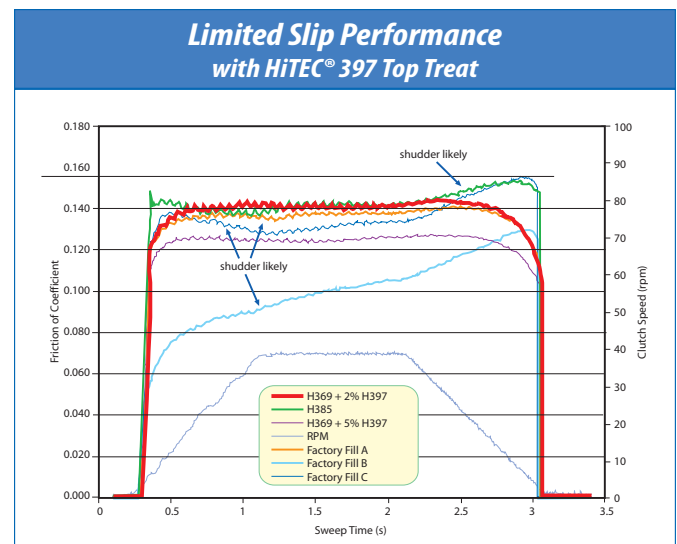

## HiTEC® 369/ISO 220 Base Oil in Grease Applications

In Lithium 12-OH	Test	1% wt.	
Worked Penetration (60x)	D1403	280	
Copper Corrosion, Rating	D4048	1b	
Four-Ball Wear, mm (1200 RPM, 75C, 40kg, 1hr)	D2266	0.5	
Four-Ball Weld, kfg	D2596	250	
Rust Prevention, Rating	D1743	Pass	
In Lithium Complex	Test	2% wt.	3% wt.
Worked Penetration (60x)	D1403	280	280
Copper Corrosion, Rating	D4048	1b	1b
Four-Ball Wear, mm (1200 RPM, 75C, 40kg, 1hr)	D2266	0.5	0.6
Four-Ball Weld, kfg	D2596	315	400
Rust Prevention, Rating	D1743	Pass	Pass