

FUELS

HiTEC[®] 3140

Gasoline Performance Additive



Enhanced VSR & Detergent System

HiTEC® 3140 Gasoline Performance Additive

Enhanced VSR & Detergent System

Key Performance Benefits

HiTEC® 3140 is a gasoline performance package that provides octane enhancement, valve seat recession (VSR) protection and engine cleanliness. The unique formulation offers a wealth of benefits to both new and old engine types, including:

- Increased octane level in unleaded gasoline
- Protection against inlet valve deposits
- Maximum protection from valve seat recession
- Enhanced fuel economy
- Improved power and acceleration
- A-rating corrosion protection
- Enhanced engine life
- Reduced Emissions
- Ethanol (E10) compatible

Recommended Dosage

HiTEC® 3140 is easy to handle and is ready to use, requiring no further dilution. The recommended treat-rate is 250ml per 40L of gasoline. This is equivalent to 6250ppmv.


At this treat-rate HiTEC® 3140 will provide significant octane enhancement and will keep injectors and inlet valves clean and free from deposit build up. Please contact your Afton representative for specific recommendations.

Typical Characteristics


Appearance:	Clear amber liquid
Density at 15°C, g/ml:	0.805
Flash point, PMCC, °C:	>56
Pour Point, °C:	-59
Kinematic viscosity at 40°C, mm ² /s:	1.26
Nitrogen content, %:	0.046

Handling Information

Max Handling Temperature:	Ambient
Shelf Life (ambient):	24 months

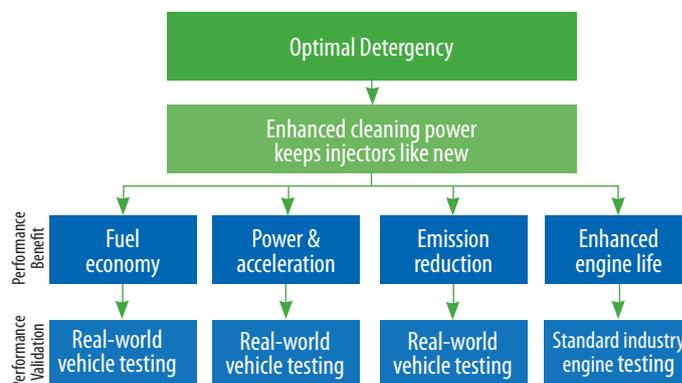

HiTEC® 3140 Provides a Boost In Octane Number

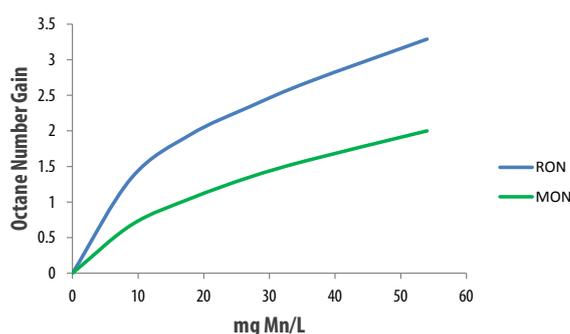

HiTEC® 3140 Provides Valve Seat Protection

