


DRIVELINE

HiTEC[®] 8703

Off Road Additive Package

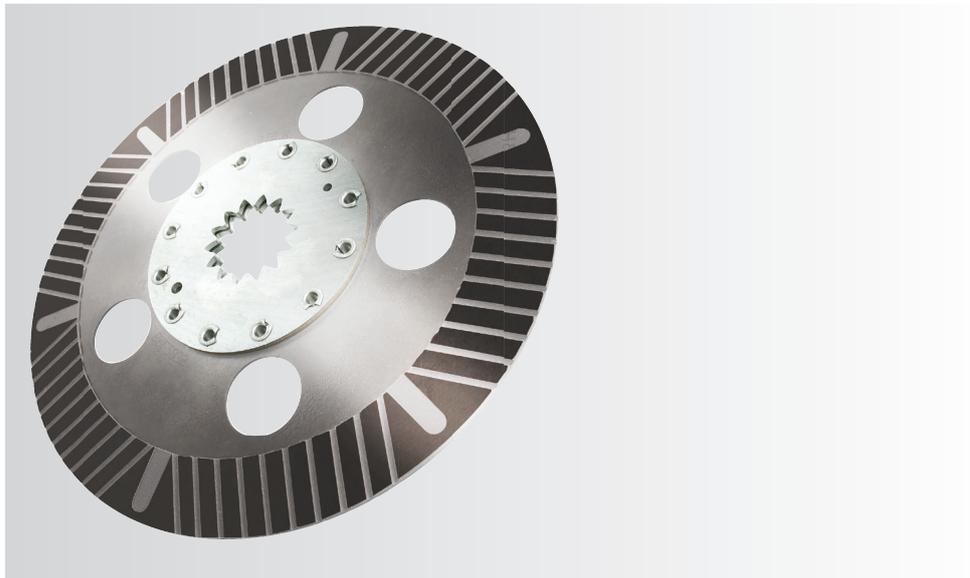

Premium UTTO Additive for Advanced Off Road Performance

HiTEC® 8703 Off Road Additive Package

Premium UTTO Additive for Advanced Off Road Performance

Ploughing Ahead™



Key performance benefits

HiTEC® 8703 is Afton Chemical's premium Off Road technology suitable for applications calling for UTTO / THF oils, providing the final drive, hydraulic, wet brake, clutch and transmission performance needed in today's tractors.

Key performance benefits of HiTEC® 8703 additive include:

- **Superior friction durability**
Friction stability via optimized detergency and balanced friction system; key for robust wet brake and transmission performance
- **Advanced final drive performance**
Superior load carrying and wear protection
- **Superior pump wear protection**
Advanced yellow-metal protection, preventing bronze transfer in hydraulic cylinders
- **Excellent cleanliness**
Oxidation and deposits control for improved cleanliness
- **Proven Field Performance**
Extensively field trialed in all types of tractors
Tested in every field!

Recommended Dosage

The recommended dosage for HiTEC® 8703 additive is 7.8% wt. (~6.7% vol.). Please contact your Afton Chemical representative for specific recommendations.

Typical Characteristics

Appearance:	Clear dark brown viscous liquid
Density at 15, g/ml:	1.014
Flash Point, °C (PMCC):	120 min.
Kinematic Viscosity at 100°C, mm²/s:	20

Handling Information

Max Handling Temp: 60°C
Shelf Life: 24 months at 40 - 45°C

Approvals**

Product	Off Road Specifications										Hydraulic Specs					Wet Brake Specs	
	2	3	3	3	1	3	3	1	3	3	2	3	3	1	1	2	
HiTEC® 8703	2	3	3	3	1	3	3	1	3	3	2	3	3	1	1	2	

● Approvable ● Meets requirements ● Suitable for use 1 Formal approval 2 Self-certifying 3 Obsolete

*Except motor grader rear axles

** Other specifications also met - contact your Afton Chemical representative for further details

